(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

Gilbert [US/US]; 4 Cider Mill Road, Framingham, MA
01701 (US). HOOPER, Donald [US/US]; 19 Main
Circle, Shrewsbury, MA 01545 (US). BERNSTEIN,
Debra [US/US]; 443 Peakham Road, Sudbury, MA 01776
(US). ADILETTA, Matthew, J. [US/US]; 20 Monticello
Drive, Worcester, MA 01603 (US). WHEELER, William
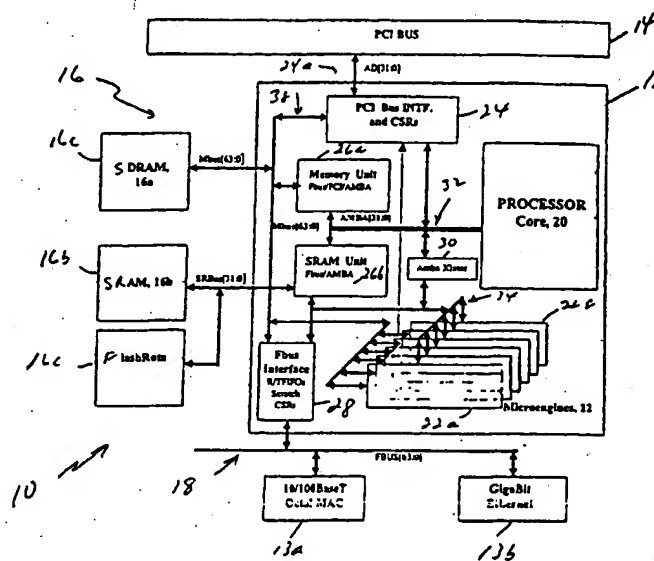[US/US]; 9 Darlene Drive, Southboro, MA 01772 (US).

(74) Agent: HARRIS, Scott, C.; Fish & Richardson P.C., Suite
500, 4350 La Jolla Village Drive, San Diego, CA 92122
(US).

(54) Title: THREAD SIGNALING IN MULTI-THREADED NETWORK PROCESSOR

(57) Abstract: A parallel hardware-based multithreaded processor is described. The processor includes a general purpose processor
that coordinates system functions and a plurality of microengines that support multiple program threads. The processor also includes
a memory control system that has a first memory controller that sorts memory references based on whether the memory references
are directed to an even bank or an odd bank of memory and a second memory controller that optimizes memory references based
upon whether the memory references are read references or write references. A program thread communication scheme for packet
processing is also described.

IT, LU, MC, NL, PT. SE, TR), OAPI patent (BF, BJ. CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:
— *Without international search report and to be republished upon receipt of that report.*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

THREAD SIGNALING IN MULTI-THREADED NETWORK PROCESSOR

BACKGROUND

This invention relates to network packet processing.

Parallel processing is an efficient form of information processing of concurrent events in a computing process. Parallel processing demands concurrent execution of many programs in a computer, in contrast to sequential processing. In the context of a parallel processor, parallelism involves doing more than one thing at the same time. Unlike a serial paradigm where all tasks are performed sequentially at a single station or a pipelined machine where tasks are performed at specialized stations, with parallel processing, a plurality of stations are provided with each capable of performing all tasks. That is, in general all or a plurality of the stations work simultaneously and independently on the same or common elements of a problem. Certain problems are suitable for solution by applying parallel processing.

SUMMARY

According to an aspect of the present invention, a method for processing of network packets includes receiving network packets and operating on the network packets with a plurality of program threads to affect processing of the packets.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram of a communication system employing a hardware-based multithreaded processor.

FIG. 2 is a detailed block diagram of the hardware-based multithreaded processor of FIG. 1.

FIG. 3 is a block diagram of a microengine functional unit employed in the hardware-based multithreaded processor of FIGS. 1 and 2.

FIG. 4 is a block diagram of a memory controller for enhanced bandwidth operation used in the hardware-based multithreaded processor.

FIG. 5 is a block diagram of a memory controller for latency limited operations used in the hardware-based multithreaded processor.

FIG. 6 is a block diagram of a communication bus interface in the processor of FIG. 1 depicting hardware used in program thread signaling.

FIGS. 7A-7B are a pictorial representation and flow chart useful in understanding program thread signaling with a clear on read register.

FIG. 8 is a flow chart of an inter-thread signaling scheme.

FIG. 9 is a flow chart of a program thread status reporting process.

DESCRIPTION

Architecture:

Referring to FIG. 1, a communication system 10 includes a parallel, hardware-based multithreaded processor 12. The hardware-based multithreaded processor 12 is coupled to a bus such as a Peripheral Component Interconnect (PCI) bus 14, a memory system 16 and a second bus 18. The system 10 is especially useful for tasks that can be broken into parallel subtasks or functions. Specifically hardware-based multithreaded processor 12 is useful for tasks that are bandwidth oriented rather than latency oriented. The hardware-based multithreaded processor 12 has multiple microengines 22 each with multiple hardware controlled program threads that can be simultaneously active and independently work on a task.

The hardware-based multithreaded processor 12 also includes a central controller 20 that assists in loading microcode control for other resources of the hardware-based multithreaded processor 12 and performs other general purpose computer type functions such as handling protocols, exceptions, extra support for packet processing where the microengines pass the packets off for more detailed processing such as in boundary

conditions.   In one embodiment, the processor 20 is a Strong

Arm° (Arm is a trademark of ARM Limited, United Kingdom) based

architecture.   The general purpose microprocessor 20 has an

operating system.   Through the operating system the processor 20

can call functions to operate on microengines 22a-22f.   The

processor 20 can use any supported operating system preferably a

real time operating system.   For the core processor implemented

as a Strong Arm architecture, operating systems such as,

Microsoft NT real-time, VXWorks and µCUS, a freeware operating

system available over the Internet, can be used.

The hardware-based multithreaded processor 12 also

includes a plurality of microengines 22a-22f.   Microengines 22a-

22f each maintain a plurality of program counters in hardware and

states associated with the program counters.   Effectively, a

corresponding plurality of sets of program threads can be

simultaneously active on each of the microengines 22a-22f while

only one is actually operating at any one time.

In one embodiment, there are six microengines 22a-22f,

each having capabilities for processing four hardware program

threads.   The six microengines 22a-22f operate with shared

resources including memory system 16 and bus interfaces 24 and

28.   The memory system 16 includes a Synchronous Dynamic Random

Access Memory (SDRAM) controller 26a and a Static Random Access

Memory (SRAM) controller 26b. SDRAM memory 16a and SDRAM

controller 26a are typically used for processing large volumes of

data, e.g., processing of network payloads from network packets.

The SRAM controller 26b and SRAM memory 16b are used in a

networking implementation for low latency, fast access tasks,

e.g., accessing look-up tables, memory for the core processor 20,

and so forth.

Hardware context swapping enables other contexts with

unique program counters to execute in the same microengine.

Hardware context swapping also synchronizes completion of tasks.

For example, two program threads could request the same shared

resource e.g., SRAM. Each one of these separate functional

units, e.g., the FBUS interface 28, the SRAM controller 26a, and

the SDRAM controller 26b, when they complete a requested task

from one of the microengine program thread contexts reports back

a flag signaling completion of an operation. When the flag is

received by the microengine, the microengine can determine which

program thread to turn on.

As a network processor, e.g., a router, the hardware-

based multithreaded processor 12 interfaces to network devices

such as a media access controller device e.g., a 10/100BaseT

Octal MAC 13a or a Gigabit Ethernet device 13b. In general, as a

network processor, the hardware-based multithreaded processor 12

can interface to any type of communication device or interface
that receives/sends large amounts of data. The network processor
can function as a router 10 in a networking application route
network packets amongst devices 13a, 13b in a parallel manner.
With the hardware-based multithreaded processor 12, each network
packet can be independently processed.

The processor 12 includes a bus interface 28 that
couples the processor to the second bus 18. Bus interface 28 in
one embodiment couples the processor 12 to the so-called FBUS 18
(FIFO bus). The FBUS interface 28 is responsible for controlling
and interfacing the processor 12 to the FBUS 18. The FBUS 18 is
a 64-bit wide FIFO bus, used to interface to Media Access
Controller (MAC) devices. The processor 12 includes a second
interface e.g., a PCI bus interface 24 that couples other system
components that reside on the PCI 14 bus to the processor 12.

The functional units are coupled to one or more
internal buses. The internal buses are dual, 32 bit buses (i.e.,
one bus for read and one for write). The hardware-based
multithreaded processor 12 also is constructed such that the sum
of the bandwidths of the internal buses in the processor 12
exceed the bandwidth of external buses coupled to the processor
12. The processor 12 includes an internal core processor bus 32,
e.g., an ASB bus (Advanced System Bus) that couples the processor

core 20 to the memory controllers 26a, 26b and to an ASB

translator 30 described below. The ASB bus is a subset of the so

called AMBA bus that is used with the Strong Arm processor core.

The processor 12 also includes a private bus 34 that couples the

microengine units to SRAM controller 26b, ASB translator 30 and

FBUS interface 28. A memory bus 38 couples the memory controller

26a, 26b to the bus interfaces 24 and 28 and memory system 16

including flashrom 16c used for boot operations and so forth.

        Referring to FIG. 2, each of the microengines 22a-22f

includes an arbiter that examines flags to determine the

available program threads to be operated upon. Any program

thread from any of the microengines 22a-22f can access the SDRAM

controller 26a, SDRAM controller 26b or FBUS interface 28. The

SDRAM controller 26a and SDRAM controller 26b each include a

plurality of queues to store outstanding memory reference

requests. The queues either maintain order of memory references

or arrange memory references to optimize memory bandwidth.

        If the memory subsystem 16 is flooded with memory

requests that are independent in nature, the processor 12 can

perform memory reference sorting. Memory reference sorting

reduces dead time or a bubble that occurs with accesses to SRAM.

Memory reference sorting allows the processor 12 to organize

references to memory such that long strings of reads can be

followed by long strings of writes.

Reference sorting helps maintain parallel hardware context program threads. Reference sorting allows hiding of pre-charges from one SDRAM bank to another. If the memory system 16b is organized into an odd bank and an even bank, while the processor is operating on the odd bank, the memory controller 26b can start precharging the even bank. Precharging is possible if memory references alternate between odd and even banks. By ordering memory references to alternate accesses to opposite banks, the processor 12 improves SDRAM bandwidth. Additionally, other optimizations can be used. For example, merging optimizations where operations that can be merged, are merged prior to memory access, open page optimizations where by examining addresses, an opened page of memory is not reopened, chaining which allows for special handling of contiguous memory references and refreshing mechanisms, can be employed.

The FBUS interface 28 supports Transmit and Receive flags for each port that a MAC device supports, along with an Interrupt flag indicating when service is warranted. The FBUS interface 28 also includes a controller 28a that performs header processing of incoming packets from the FBUS 18. The controller 28a extracts the packet headers and performs a microprogrammable source/destination/protocol hashed lookup (used for address

smoothing) in SRAM.   If the hash does not successfully resolve,
the packet header is sent to the processor core 20 for additional
processing.   The FBUS interface 28 supports the following
internal data transactions:

FBUS unit	(Shared bus SRAM)	to/from microengine.
FBUS unit	(via private bus)	writes from SDRAM Unit.
FBUS unit	(via Mbus)	Reads to SDRAM.

        The FBUS 18 is a standard industry bus and includes a
data bus, e.g., 64 bits wide and sideband control for address and
read/write control.   The FBUS interface 28 provides the ability
to input large amounts of data using a series of input and output
FIFO's 29a-29b.   From the FIFOs 29a-29b, the microengines 22a-22f
fetch data from or command the SDRAM controller 26a to move data
from a receive FIFO in which data has come from a device on bus
18, into the FBUS interface 28.   The data can be sent through
memory controller 26a to SDRAM memory 16a, via a direct memory
access.   Similarly, the microengines can move data from the SDRAM
26a to interface 28, out to FBUS 18, via the FBUS interface 28.

        Data functions are distributed amongst the
microengines. Connectivity to the SRAM 26a, SDRAM 26b and FBUS
28 is via command requests. A command request can be a memory
request or a FBUS request. For example, a command request can

move data from a register located in a microengine 22a to a
shared resource, e.g., an SDRAM location, SRAM location, flash
memory or some MAC address. The commands are sent out to each of
the functional units and the shared resources. However, the
shared resources do not need to maintain local buffering of the
data. Rather, the shared resources access distributed data
located inside of the microengines. This enables microengines
22a-22f, to have local access to data rather than arbitrating for
access on a bus and risk contention for the bus. With this
feature, there is a 0 cycle stall for waiting for data internal
to the microengines 22a-22f.

The core processor 20 also can access the shared
resources. The core processor 20 has a direct communication to
the SDRAM controller 26a to the bus interface 24 and to SRAM
controller 26b via bus 32. To access the microengines 22a-22f
and transfer registers located at any of the microengines 22a-
22f, the core processor 20 access the microengines 22a-22f via
the ASB Translator 30 over bus 34. The ASB Translator 30
performs an address translation between FBUS microengine transfer
register locations and core processor addresses (i.e., ASB bus)
so that the core processor 20 can access registers belonging to
the microengines 22a-22c.

Although microengines 22 can use the register set to

exchange data. A scratchpad memory 27 is also provided to permit

microengines to write data out to the memory for other

microengines to read. The scratchpad 27 is coupled to bus 34.

Microengines:

        Referring to FIG. 3, an exemplary one of the

microengines 22a-22f, e.g., microengine 22f is shown. The

microengine includes a control store 70 which, in one

implementation, includes a RAM of here 1,024 words of 32 bits.

The RAM stores a microprogram that is loadable by the core

processor 20. The microengine 22f also includes controller logic

72. The controller logic includes an instruction decoder 73 and

program counter (PC) units 72a-72d. The four micro program

counters 72a-72d are maintained in hardware. The microengine 22f

also includes context event switching logic 74. Context event

logic 74 receives messages (e.g., SEQ_#_EVENT_RESPONSE;

FBI_EVENT_RESPONSE; SRAM _EVENT_RESPONSE; SDRAM _EVENT_RESPONSE;

and ASB _EVENT_RESPONSE) from each one of the shared resources,

e.g., SRAM 26a, SDRAM 26b, or processor core 20, control and

status registers, and so forth. These messages provide

information on whether a requested function has completed. Based

on whether or not a function requested by a program thread has

completed and signaled completion, the program thread needs to

-11-

wait for that completion signal, and if the program thread is
enabled to operate, then the program thread is placed on an
available program thread list (not shown). The microengine 22f
can have a maximum of, e.g., 4 program threads available.

In addition to event signals that are local to an
executing program thread, the microengines 22 employ signaling
states that are global. With signaling states, an executing
program thread can broadcast a signal state to all microengines
22. Any program thread in the microengines can branch on these
signaling states. These signaling states can be used to
determine availability of a resource or whether a resource is due
for servicing.

The context event logic 74 has arbitration for the four
(4) program threads. In one embodiment, the arbitration is a
round robin mechanism. Other techniques could be used including
priority queuing or weighted fair queuing. The microengine 22f
also includes an execution box (EBOX) data path 76 that includes
an arithmetic logic unit 76a and general purpose register set
76b. The arithmetic logic unit 76a performs arithmetic and
logical functions as well as shift functions. The registers set
76b has a relatively large number of general purpose registers.
In this implementation there are 64 general purpose registers in
a first bank, Bank A and 64 in a second bank, Bank B. The

-12-

general purpose registers are windowed so that they are
relatively and absolutely addressable.

The microengine 22f also includes a write transfer
register stack 78 and a read transfer stack 80. These registers
are also windowed so that they are relatively and absolutely
addressable. Write transfer register stack 78 is where write
data to a resource is located. Similarly, read register stack 80
is for return data from a shared resource. Subsequent to or
concurrent with data arrival, an event signal from the respective
shared resource e.g., the SRAM controller 26a, SDRAM controller
26b or core processor 20 will be provided to context event
arbiter 74 which will then alert the program thread that the data
is available or has been sent. Both transfer register banks 78
and 80 are connected to the execution box (EBOX) 76 through a
data path. In one implementation, the read transfer register has
64 registers and the write transfer register has 64 registers.

Each microengine 22a-22f supports multi-threaded
execution of four contexts. One reason for this is to allow one
program thread to start executing just after another program
thread issues a memory reference and must wait until that
reference completes before doing more work. This behavior is
critical to maintaining efficient hardware execution of the
microengines because memory latency is significant. Stated

differently, if only a single program thread execution was
supported, the microengines would sit idle for a significant
number of cycles waiting for references to return and thereby
reduce overall computational throughput. Multi-threaded
execution allows an microengines to hide memory latency by
performing useful independent work across several program
threads. Two synchronization mechanisms are supplied in order to
allow a program thread to issue an SRAM or SDRAM reference, and
then subsequently synchronize to the point in time when that
reference completes.

One mechanism is Immediate Synchronization. In
immediate synchronization, the microengine issues the reference
and immediately swaps out of that context. The context will be
signaled when the corresponding reference completes. Once
signaled, the context will be swapped back in for execution when
a context-swap event occurs and it is its turn to run. Thus,
from the point of view of a single context's instruction stream,
the microword after issuing the mem reference does not get
executed until the reference completes.

A second mechanism is Delayed Synchronization. In
delayed synchronization, the microengine issues the reference,
and continues to execute some other useful work independent of
the reference. Some time later it could become necessary to

-14-

synchronize the program thread's execution stream to the completion of the issued reference before further work is performed. At this point a synchronizing microword is executed that will either swap out the current program thread, and swap it back in sometime later when the reference has completed, or continue executing the current program thread because the reference has already completed. Delayed synchronization is implemented using two different signaling schemes:

If the memory reference is associated with a transfer register, the signal from which the program thread is triggered is generated when the corresponding transfer register valid bit is set or cleared. For example, an SRAM read which deposits data into transfer register A would be signaled when the valid bit for A is set. If the memory reference is associated with the transfer FIFO or the receive FIFO, instead of a transfer register, then the signal is generated when the reference completes in the SDRAM controller 26a. Only one signal state per context is held in the microengines scheduler, thus only one outstanding signal can exist in this scheme.

Referring to FIG. 4, the SDRAM memory controller 26a includes memory reference queues 90 where memory reference requests arrive from the various microengines 22a-22f. The memory controller 26a includes an arbiter 91 that selects the

next the microengine reference requests to go to any of the functioning units. Given that one of the microengines is providing a reference request, the reference request will come through the address and command queue 90, inside the SDRAM controller 26a. If the reference request has a bit set called the "optimized MEM bit" the incoming reference request will be sorted into either the even bank queue 90a or the odd bank queue 90b. If the memory reference request does not have a memory optimization bit set, the default will be to go into an order queue 90c. The SDRAM controller 26 is a resource which is shared among the FBUS interface 28, the core processor 20 and the PCI interface 24. The SDRAM controller 26 also maintains a state machine for performing READ-MODIFY-Write atomic operations. The SDRAM controller 26 also performs byte alignment for requests of data from SDRAM.

The order queue 90c maintains the order of reference requests from the microengines. With a series of odd and even banks references it may be required that a signal is returned only upon completion of a sequence of memory references to both the odd and even banks. If the microengine 22f sorts the memory references into odd bank and even bank references and one of the banks, e.g., the even bank is drained of memory references before the odd bank but the signal is asserted on the last even

reference, the memory controller 26a could conceivably signal back to a microengine that the memory request had completed, even though the odd bank reference had not been serviced. This occurrence could cause a coherency problem. The order queue 90c allows a microengine to have multiple memory references outstanding of which only its last memory reference needs to signal a completion.

The SDRAM controller 26a also includes a high priority queue 90d. In the high priority queue 90d, an incoming memory reference from one of the microengines goes directly to the high priority queue and is operated upon at a higher priority than other memory references in the other queues. All of these queues, the even bank queue 90a, the odd bank queue 90b, the order queue 90c and the high priority queue, are implemented in a single RAM structure that is logically segmented into four different windows, each window having its own head and tail pointer. Since filling and draining operations are only a single input and a single output, they can be placed into the same RAM structure to increase density of RAM structures.

The SDRAM controller 26a also includes core bus interface logic i.e., ASB bus 92. The ASB bus interface logic 92 interfaces the core processor 20 to the SDRAM controller 26a. If there is incoming data from the core processor 20 via ASB

interface 92, the data can be stored into the MEM ASB device 98
and subsequently removed from MEM ASB device 98 through the SDRAM
interface 110 to SDRAM memory 16a. Although not shown, the same
queue structure can be provided for the reads. The SDRAM
controller 26a also includes an engine 97 to pull data from the
microengines and PCI bus.

Additional queues include the PCI address queue 94 and
ASB read/write queue 96 that maintain a number of requests. The
memory requests are sent to SDRAM interface 110 via multiplexer
106. The multiplexer 106 is controlled by the SDRAM arbiter 91
which detects the fullness of each of the queues and the status
of the requests and from that decides priority based on a
programmable value stored in a priority service control register
100.

Referring to FIG. 5, the memory controller 26b for the
SRAM is shown. The memory controller 26b includes an address and
command queue 120. The memory controller 26b is optimized based
on the type of memory operation, i.e., a read or a write. The
address and command queue 120 includes a high priority queue
120a, a read queue 120b which is the predominant memory reference
function that an SRAM performs, and an order queue 120c which in
general will include all writes to SRAM and reads that are to be
non-optimized. Although not shown, the address and command

queue 120 could also include a write queue.

The SRAM controller 26b also includes core bus interface logic i.e., ASB bus 122. The ASB bus interface logic 122 interfaces the core processor 20 to the SRAM controller 26b. The SRAM controller 26b also includes an engine 127 to pull data from the microengines and PCI bus.

The memory requests are sent to SRAM interface 140 via multiplexer 126. The multiplexer 126 is controlled by the SRAM arbiter 131 which detects the fullness of each of the queues and the status of the requests and from that decides priority based on a programmable value stored in a priority service control register 130. Once control to the multiplexer 126 selects a memory reference request, the memory reference request, is sent to a decoder 138 where it is decoded and an address is generated.

The SRAM Unit maintains control of the Memory Mapped off-chip SRAM and Expansion ROM. The SRAM controller 26b can address, e.g., 16 MBytes, with, e.g., 8 MBytes mapped for SRAM 16b, and 8 MBytes reserved for special functions including: Boot space via flashrom 16c; and Console port access for MAC devices 13a, 13b and access to associated (RMON) counters. The SRAM is used for local look-up tables and queue management functions.

The SRAM controller 26b supports the following transactions:

Microengine requests   (via private bus) to/from SRAM.

Core Processor   (via ASB bus)   to/from SRAM.

The address and command queue 120 also includes a Read

Lock Fail Queue 120d. The Read Lock Fail Queue 120d is used to

hold read memory reference requests that fail because of a lock

existing on a portion of memory.

Referring to FIG. 6, communication between the

microengines 22 and the FBUS interface Logic (FBI) is shown. The

FBUS interface 28 in a network application can performs header

processing of incoming packets from the FBUS 18.   A key function

which the FBUS interface performs is extraction of packet

headers, and a microprogrammable source/destination/protocol

hashed lookup in SRAM . If the hash does not successfully

resolve, the packet header is promoted to the core processor 28

for more sophisticated processing.

The FBI 28 contains a Transmit FIFO 182, a Receive FIFO

183, a HASH unit 188 and FBI control and status registers 189.

These four units communicate with the microengines 22, via a

time-multiplexed access to the SRAM bus 38 which is connected to

the transfer registers 78, 80 in the microengines. That is, all

communications to and from the microengines are via the transfer

registers 78, 80. The FBUS interface 28 includes a push state

machine 200 for pushing data into the transfer registers during

the time cycles which the SRAM is NOT using the SRAM data bus

(part of bus 38) and a pull state machine 202 for fetching data

from the transfer registers in the respective microengine.

The Hashing unit includes a pair of FIFO's 188a, 188b.

The hash unit determines that the FBI 28 received an FBI_hash

request. The hash unit 188 fetches hash keys from the calling

microengine 22. After the keys are fetched and hashed, the

indices are delivered back to the calling microengine 22. Up to

three hashes are performed under a single FBI_hash request. The

busses 34 and 38 are each unidirectional: SDRAM_push/pull_data,

and Sbus_push/pull_data. Each of these busses require control

signals which will provide read/write controls to the appropriate

microengine 22 Transfer registers.

Generally, transfer registers require protection from

the context controlling them to guarantee read correctness. In

particular, if a write transfer register is being used by a

thread_1 to provide data to the SDRAM 16a, thread_1 does not

overwrite this register until the signal back from SDRAM

controller 26a indicates that this register has been promoted and

may now be re-used. Every write does not require a signal back

from the destination indicating that the function has been

completed, because if the program thread writes to the same
command queue at that destination with multiple requests, the
order of the completion is guaranteed within that command queue,
thus only the last command requires the signaling back to the
program thread. However, if the program thread uses multiple
command queues (order and read), then these command requests are
broken into separate context tasks, so that ordering is
maintained via context swapping. The exception case indicated
at the beginning of this paragraph is relative to a certain class
of operations using an unsolicited PUSH to transfer registers
from the FBI for FBUS status information. In order to protect
read/write determinism on the transfer registers, the FBI
provides a special Push_protect signal when these special FBI
push operations are set up.

Any microengine 22 that uses the FBI unsolicited push
technique must test the protection flag prior to accessing the
FBUS interface/microengine agreed upon transfer registers. If
the flag is not asserted, then the transfer registers may be
accessed by the microengines 22. If the flag is asserted then
the context should wait N cycles prior to accessing the
registers. This count is determined a priori by the number of
transfer registers being pushed, plus a frontend protection
window. The microengine tests this flag then moves the data from

the read transfer registers to GPR's in contiguous cycles, so the
push engine does not collide with the microengine read.

Thread signaling for packet processing

Special techniques such as inter-thread communications
to communicate status, a self destruct register 210 to allow
program threads to self assign tasks and a thread_done register
212 to provide a global program thread communication scheme are
used for packet processing. The destruct register 210 and a
thread_done register 212 can be implemented as control and status
registers 189. They are shown in the FBUS interface 28 outside
of the block labeled CSR for clarity. Network functions are
implemented in the network processor using a plurality of program
threads e.g., contexts to process network packets. For example,
scheduler program threads could be executed in one of the
microprogram engines e.g., 22a whereas, processing program
threads could execute in the remaining engines e.g., 22b-22f.
The program threads (processing or scheduling program threads)
use inter-thread communications to communicate status.

Program threads are assigned specific tasks such as
receive and transmit scheduling, receive processing, and transmit
processing, etc. Task assignment and task completion are
communicated between program threads through the inter-thread

-23-

signaling, registers with specialized read and write
characteristics, e.g., the self-destruct register 210 and the
thread-done register 212, SRAM 16b and data stored in the
internal scratchpad memory 186 (FIG. 6) resulting from operations
such as bit set, and bit clear.

The network processor 10 includes a general context
communication signaling protocol that allows any context to set a
signal that any other context can detect. This allows
cooperating program threads to use a semaphore and thus
coordinate using micro-code controlled processing.

Processing of network packets can use multiple program
threads. Typically, for network processing there is a receive
scheduler, a transmit scheduler and processing program threads.
A scheduler (either receive or transmit) program thread
coordinates amounts of work to be done and sequence of work by
processing program threads. The scheduler program thread assigns
tasks to processing program threads and in some cases processing
program threads can assign tasks to other processing program
threads. For instance, a scheduler determines which ports need
service and assigns and coordinates tasks to processing program
threads to overcome inherent memory latency by processing
multiple program threads in parallel.

In some examples, with slow ports one processing

program thread may perform processing on a portion of a packet

and a second processing program thread processes the remainder of

the packet or in some cases the scheduler uses the next available

program thread. With faster ports e.g., Gigabit ports where 64

byte packets are received very fast, the scheduler can assign M

packets to the next available program thread. The program

threads signal each other as to what part of a packet the program

thread has processed and its status.

A program thread can be assigned to process the first

64 bytes of a packet. When the program thread is finish, the

program thread has data to set signals to wake up the next

program thread has been assigned to process the next 64 bytes.

The program thread may write a register and an address of the

register in a pre-assigned memory location, e.g., scratch

register. The program thread sets signals to wake up the next

program thread that has been assigned to work on the next bytes

of the packet.

Referring to FIGS. 7A-7B, the self-destruct register

210 allows one scheduler program thread S, (230 in FIG. 7B) to

request services from multiple program threads P_a-P_n that provide

the requested service. The first program thread, e.g., P_i that

accesses (232 in FIG. 7B) the self_destruct register 210 takes

the request. The "self-destruct register" 210 zeros, i.e.,

clears (234 in FIG. 7B) upon being read by a program thread.
Other program threads capable of servicing that request will no
longer be presented with an active request. For example, a
program context can request a task be assigned to the first
context that is ready, by writing to the self-destruct register
210. A context checks for an assignment by reading the "self-
destruct register" 210. If the value of the self destruct
register is 0, there is no new task presently available to assign
to the program thread. This could indicate that there are no new
tasks or that another program thread may have assigned itself to
the task and cleared the self destruct register 210. If the
value is non-zero, the contents of the self destruct register are
interpreted to determine the task, and the register is cleared
upon reading by the context. Thus, contexts reading this
register for assignment wait for the register to be written
subsequently with the next task instruction.

Referring to FIG. 8, for networking applications
typically different program contexts are used to perform specific
system tasks. Tasks include receive scheduling, receive
processing contexts, transmit arbiter, transmit scheduling,
transmit filling and processor core communications.

The receive scheduler initiates 242 a receive operation
of e.g., 64 or 128 bytes of input data by sending a command to

the FBI interface 28 that specifies a port from which to extract
the data and the Receive FIFO element to use to buffer that data
as well as the microengine context to be notified once the
receive data has been fetched.

The receive scheduler thread 244 sends a signal to the
specified microengine program thread that activates a specified
context. The context reads the FBI Receive Control register to
obtain the necessary receive information for processing (i.e.
port, Receive FIFO element location, byte count, start of packet,
end of packet, error status). If a start of packet is indicated
the receive scheduler program thread is responsible for
determining where in SDRAM to store the data, (i.e., the output
queue to insert the packet) and writing the packet data into
SDRAM. If it is not the start of a packet, then the receive
program thread determines where the earlier data of this packet
was stored in order to continue processing 246 of the packet.
When the end of packet indication is received 248 (or after the
first 64 byte section if receive to transmit latency is
optimized) the receive program thread adds the packet to the
queue determined by processing the packet header.

The program threads also communicate with a shared
resource through a bit set and bit clear mechanism that provides
a bit vector. This mechanism allows setting and clearing of

individual bits and performing a test and set on individual bits to control a shared resource. The bit vector signals the non-emptiness of output queues. When a receive program thread enqueues a packet, the receive scheduler sets 250 a bit. The transmit scheduler can examine the bit vector to determine the state all queues.

The bit set and bit clear operations on the bit vector, can occur in either scratchpad RAM or SRAM. If the scheduler is communicating between program threads on the same microengine 22, the bit vector can be stored in the register set because each context can read the other context's registers. For example, an empty or not empty status of each output queue is support by a bit vector in internal scratchpad memory. When a receive program thread enqueues a packet, the receive program thread uses the scratch pad bit-set command to set a bit in the queue status bit vector to indicate the queue now has at least one entry. The transmit arbiter scans 270 the queue bit vector for non empty queues (e.g., bit_x set) to determine packets that are ready to be transmitted. When removing 272 a packet from a queue for transmit if the queue empties 274, the transmit arbiter issues 276 a bit-clear command to the corresponding bit of the queue bit vector.

Referring to FIG. 9, the thread_done register is also

on the FBI 28 and is a register where bits can be set from different program threads. Each program thread can use, e.g., two bits to communicate its status to all other program threads. Also one scheduler program thread can read 292 the status of all of its processing program threads. Upon completion of a receive task, 282 a "receive" program thread writes 284 a completion code into the "thread_done" register. The receive program thread becomes inactive 286 after writing the thread_done register. That receive program thread waits for another signal from the FBI that indicates another receive task has been assigned. Program threads 1-16 have 2 bit fields for "thread_done_1", and program threads 17-24 have 2 bit fields for "thread_done_2". The 2 bit field allows a program thread to communicate different levels of task completion.

For example, the scheduler can use the two bit status "01" to indicate that data was moved to SDRAM, processing of packet is still in progress and pointers were saved; bits 10 can indicate that data was moved to SDRAM, processing of packet is still in progress and pointers were not saved; and bits 11 can indicates packet processing is completed. Thus, the states 296a can be used by the receiver scheduler program thread to assign 297a another thread to process a task when data becomes available, whereas, states 296b can be used by the receive

scheduler to assign 297b the same thread to continue processing
when the data is available.

The exact interpretation of the message can be fixed by
a software convention determined between a scheduler program
thread and processing program threads called by the scheduler
program thread. That is the status messages can change depending
on whether the convention is for receive, as above, transmit, and
so forth. In general, the status messages include "busy", "not
busy", "not busy but waiting." The status message of "not busy,
but waiting" signals that the current program thread has
completed processing of a portion of a packet and is expected to
be assigned to perform a subsequent task on the packet when data
is made available. It can be used when the program thread is
expecting data from a port and has not saved context so it should
process the rest of that packet.

The scheduler program thread reads the "thread done"
register to determine the completion status of tasks it assigned
to other program threads. The "thread done" register is
implemented as a write one to clear register, allowing the
scheduler to clear just the fields it has recognized.

Other Embodiments

It is to be understood that while the invention has

-30-

been described in conjunction with the detailed description
thereof, the foregoing description is intended to illustrate and
not limit the scope of the invention, which is defined by the
scope of the appended claims. Other aspects, advantages, and
modifications are within the scope of the following claims.

What is claimed is:

1.   A method for network packet processing comprises:

receiving network packets; and

operating on the network packets with a plurality of program
threads to affect processing of the packets.

2.   The method of claim 1 wherein operating comprises:

using at least one program thread to inspect a header
portion of the packet.

3.   The method of claim 1 wherein operating further
comprises:

signaling by the at least one program thread that a packet
header has been processed.

4.   The method of claim 1 wherein the plurality of program
threads are scheduler program threads to schedule task orders for
processing and processing program threads that process packets in
accordance with task assignments assigned by the scheduler
program threads.

5.   The method of claim 1 wherein each program thread
writes a message to a register that indicates its current status.

-32-

6.   The method of claim 5 wherein interpretation of the
message is fixed by a software convention determined between a
scheduler program thread and processing program threads called by
the scheduler program thread.

7.   The method of claim 5 wherein status messages include
busy, not busy, not busy but waiting.

8.   The method of claim 5 wherein a status message includes
not busy, but waiting and wherein the status of not busy, but
waiting signals that the current program thread has completed
processing of a portion of a packet and is expected to be
assigned to perform a subsequent task on the packet when data is
made available to continue processing of the program thread.

9.   The method of claim 5 wherein the register is a
globally accessible register that can be read from or written to
by all current program threads.

10.   The method of claim 4 wherein scheduler program threads
can schedule any one of a plurality of processing program threads
to handle processing of a task.

11.   The method of claim 10 wherein the scheduler program thread writes a register with an address corresponding to a location of data for the plurality of processing program threads.

12.   The method of claim 11 wherein a selected one of the plurality of processing program threads that can handle the task reads the register to obtain the location of the data.

13.   The method of claim 12 wherein the selected one of the plurality of processing program threads reads the register to obtain the location of the data and to assign itself to processing the task requested by the scheduler program thread.

14.   The method of claim 12 wherein the selected one of the plurality of processing tasks reads the register to obtain the location of the data, while the register is cleared by reading the register by the program thread to assign itself to process the task.

15.   The method of claim 13 wherein when another one of the plurality of processing program threads assignable to the task attempts to read the register after it has been cleared, it is

provided with a null value that indicates that there is no task
currently assignable to the processing program thread.

16.   A parallel hardware-based multithreaded processor for
receiving network packets comprises:

a general purpose processor that coordinates system
functions; and

a plurality of microengines that support multiple program
threads, and operate on the network packets with a plurality of
program threads to affect processing of the packets.

17.   The processor of claim 16 wherein one of the plurality
of microengines executes scheduler program threads and remaining
ones of the microengines execute processing program threads.

18.   The processor of claim 16 further comprising a global
thread status register wherein each program thread writes a
message to the global status register that indicates its current
status.

19.   The processor of claim 18 wherein interpretation of the
message is fixed by a software convention determined between a

scheduler program thread and processing program threads called by the scheduler program thread.

20. The processor of claim 16 further comprising:

a read once register, wherein the scheduler program thread writes the read once register with an address corresponding to a location of data for the plurality of processing program threads and when a selected one of the plurality of processing program threads reads the register to obtain the location of the data, assigns itself to processing the task requested by the scheduler program thread, while the register is cleared by reading the register by the program thread.

21. The processor of claim 20 wherein when another one of the plurality of processing program threads assignable to the task attempts to read the read once register after it has been cleared, it is provided with a null value that indicates that there is no task currently assignable to the processing program thread.
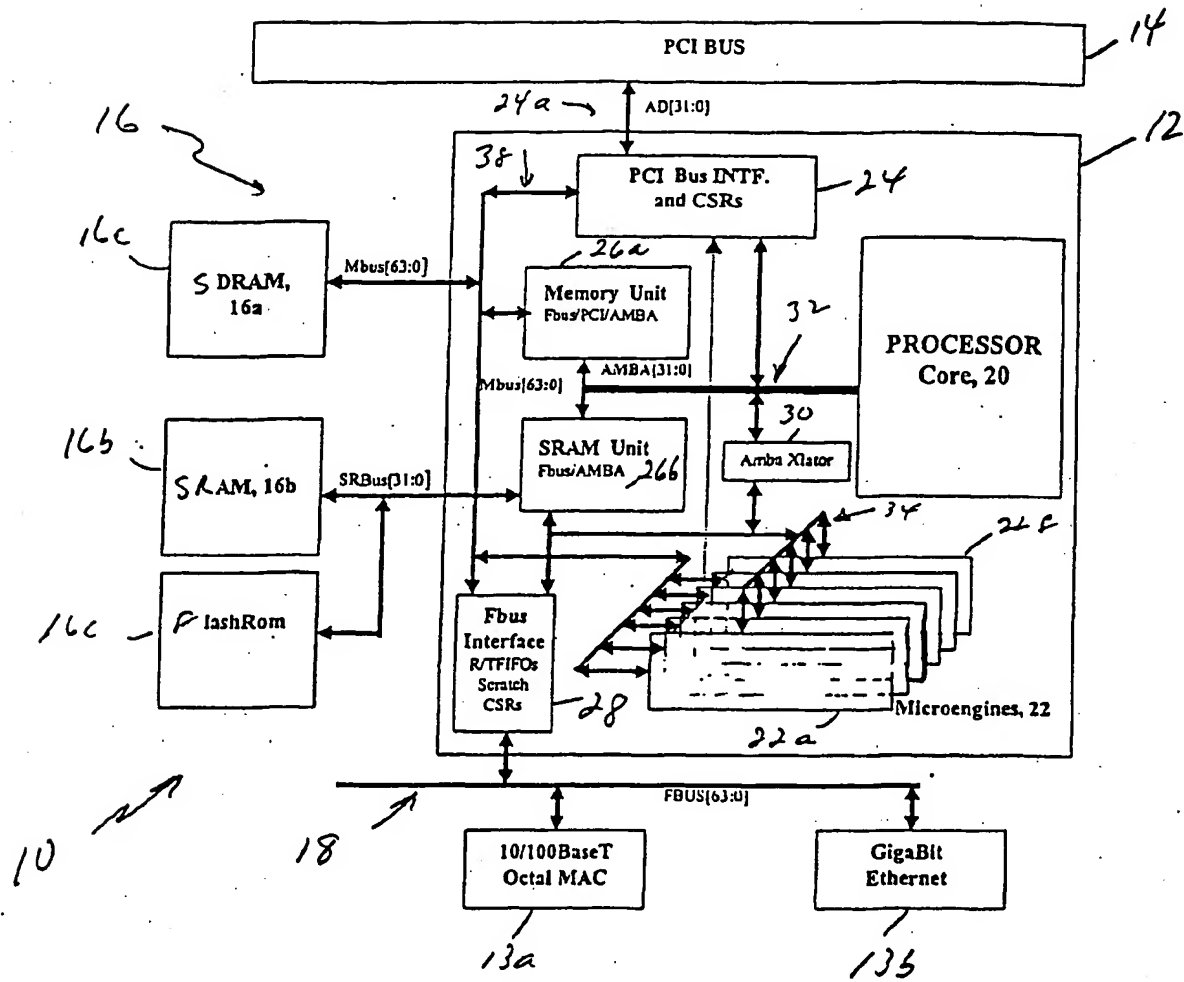
22. An apparatus comprising a machine-readable storage medium having executable instructions for network processing, the instructions enabling the apparatus to:

receive network packets; and

operate on the network packets with a plurality of program

threads to affect processing of the packets.

23. The apparatus of claim 22 wherein instructions to

operate further comprise instructions to:

use at least one program thread to inspect a header portion

of the packet.

24. The apparatus of claim 22 further comprising

instructions to provide scheduler program threads to schedule

task orders for processing and processing program threads to

process packets in accordance with task assignments assigned by

the scheduler program threads.

25. The apparatus of claim 22 wherein each program thread

writes a message to a register that indicates its current status.

26. The apparatus of claim 25 wherein the register is a

globally accessible register that can be read from or written to

by all current program threads.

27. The apparatus of claim 22 wherein the scheduler program

-37-

thread writes a register with an address corresponding to a

location of data for the plurality of processing program threads

and a selected one of the plurality of processing program threads

that can handle the task reads the register to obtain the

location of the data, and clears the register after reading by

the program thread.

28.   The apparatus of claim 27 wherein when another one of

the plurality of processing program threads assignable to the

task attempts to read the register after it has been cleared, it

is provided with a null value that indicates that there is no

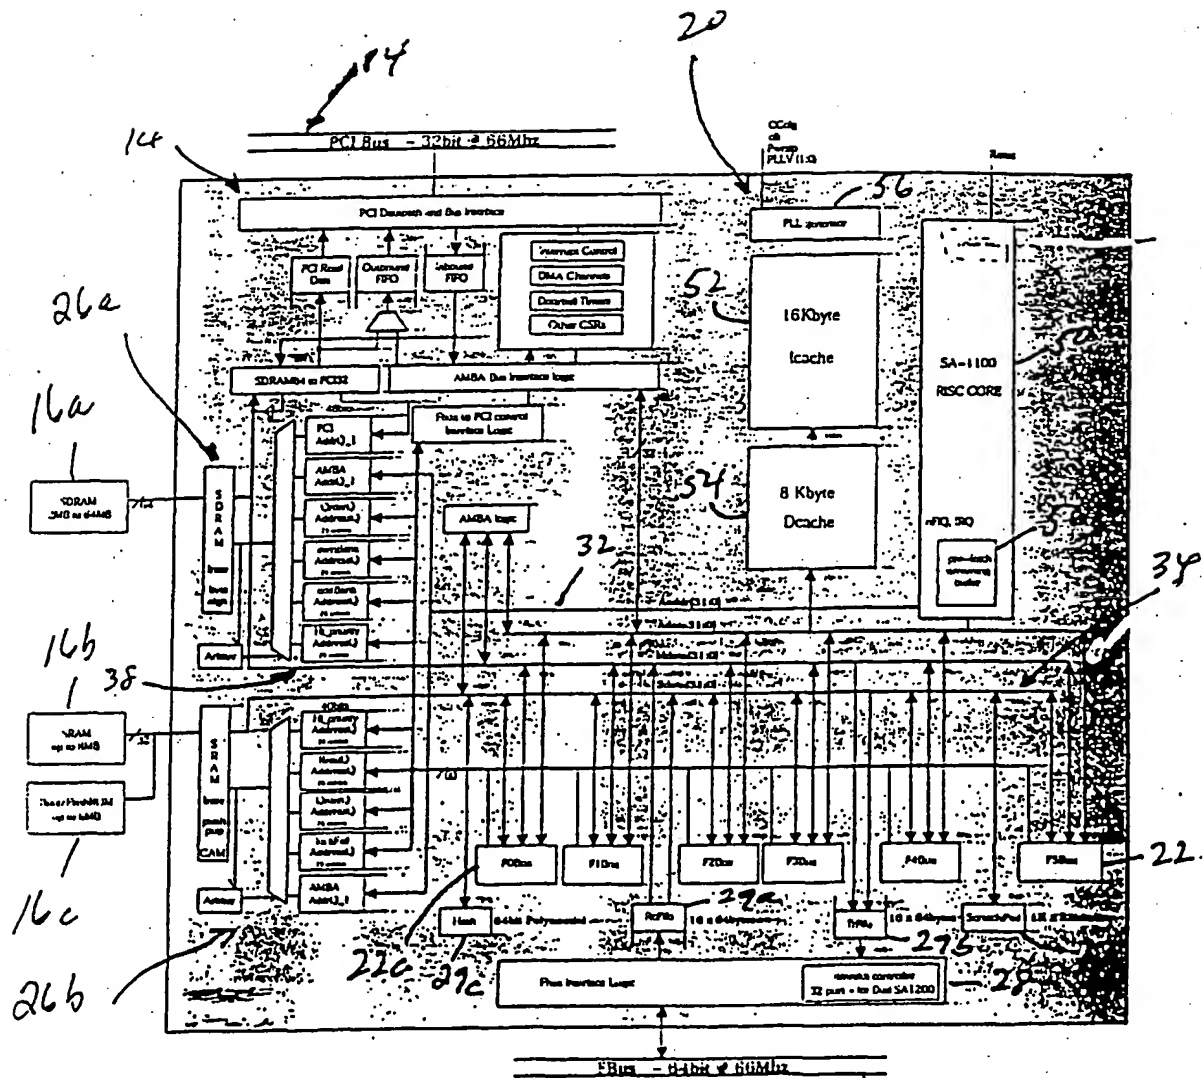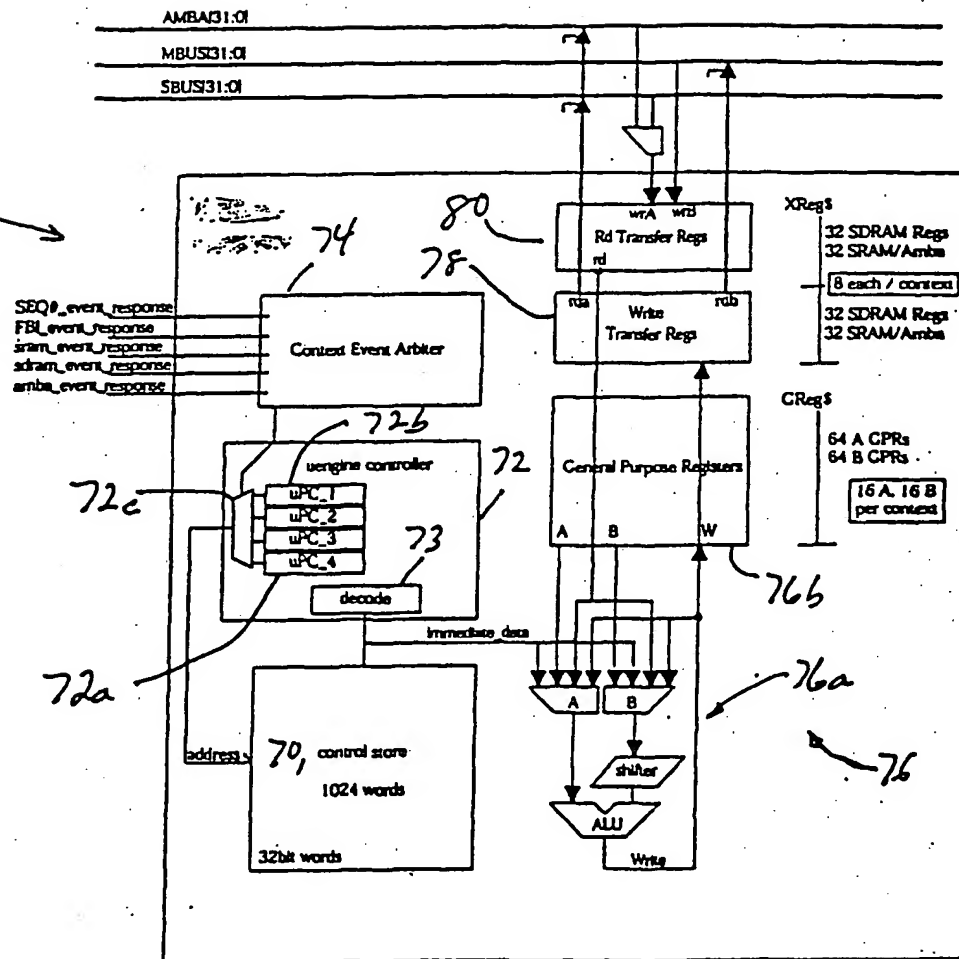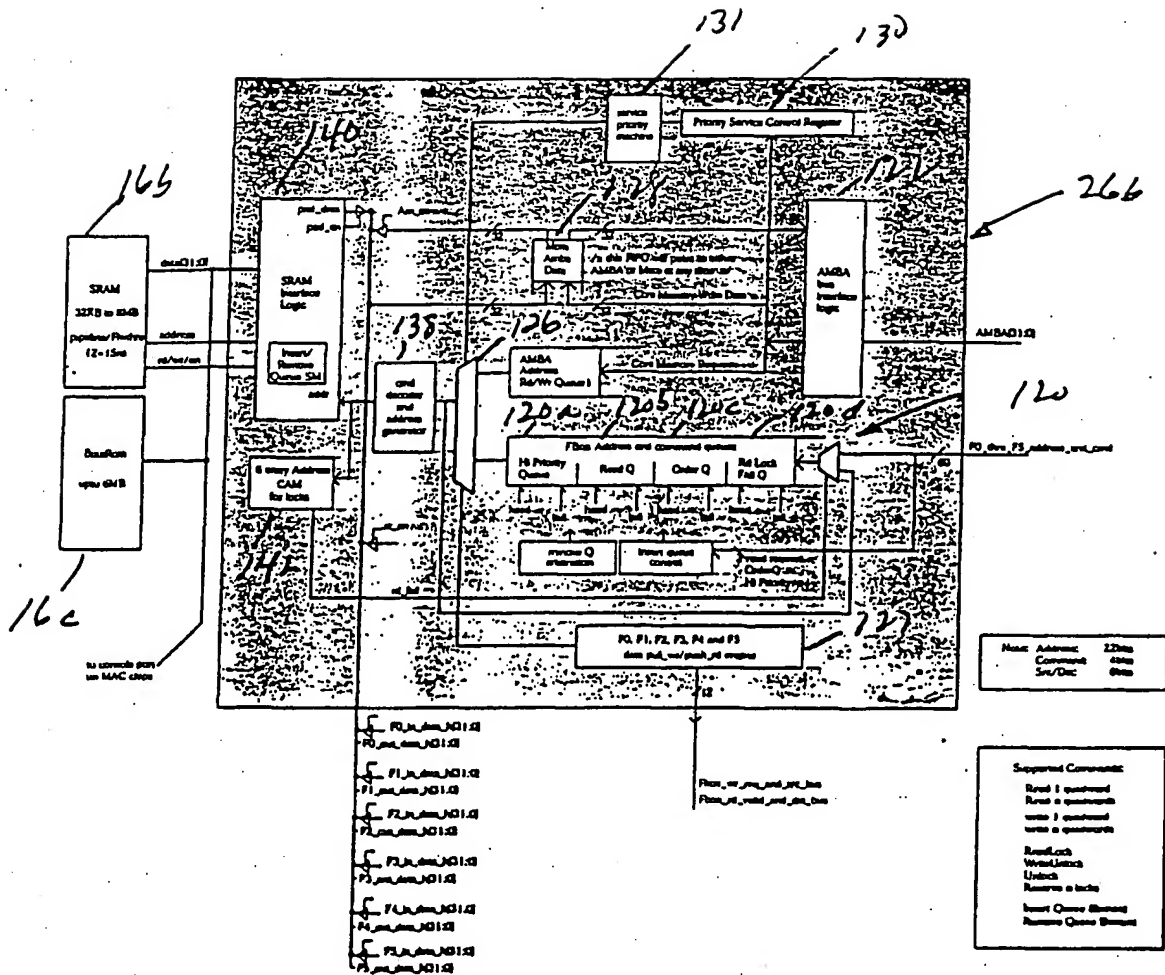task currently assignable to the processing program thread.

FIG. 1

FIG. 2

AMBA[31:0]

MBUS[31:0]

SBUS[31:0]

22f

74

80

wrA   wrB

Rd Transfer Regs

rd

XRegs

32 SDRAM Regs
32 SRAM/Amba

8 each / context

32 SDRAM Regs
32 SRAM/Amba

78

SEQ0_event_response
FBI_event_response
sram_event_response
sdram_event_response
amba_event_response

Context Event Arbiter

rda   rdb

Write
Transfer Regs

72b

72c

uengine controller

uPC_1
uPC_2
uPC_3
uPC_4

72

73

decode

General Purpose Registers

A   B   W

CRegs

64 A CPRs
64 B CPRs

16 A 16 B
per context

76b

72a

immediate_data

address

70, control store

1024 words

32bit words

A   B

shifter

ALU

Write

76a

76

F/G. 3

FIG. 4

FIG. 5

FIG. 6

FIG. 7A

FIG. 7B

FIG 8

FIG. 9